

DRIVE THE CHANGE



CORMIDI

CEO
MINI TRACKED MACHINE



DRIVE THE CHANGE


LE VERSIONI



RIA	RI	AC	HI	HIAC

DIMENSIONI

	mm	in		mm	in		mm	in		mm	in		mm	in
(A)	1677	66	(D)	115	4.5	(G)	1528	60.2	(L)	768	30.2	(O)	1675	65.9
(B)	755	29.7	(E)	695	27.4	(H)	1135	44.7	(M)	722	28.4	(P)	2010	79.1
(C)	1155	45.5	(F)	2229	87.7	(I)	740	29.1	(N)	1677	66	(Q)	2765	108.9
													(R)	695
													(S)	445
														17.5

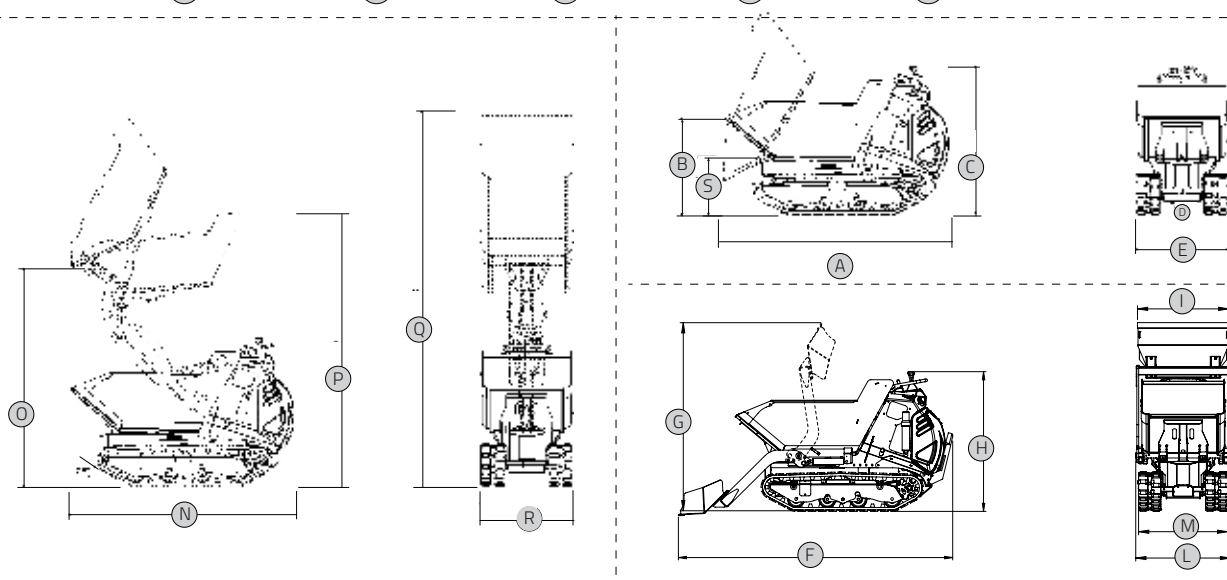

CAPACITA' CASSONI

BE-DE-BHE DHE-ACDHE-DEAC	ACQUA 0,15 m³ 0,2 yd³	RASO 0,22 m³ 0,29 yd³	COLMO SAE 0,28 m³ 0,37 yd³
RIA		RASO 0,13 m³ 0,17 yd³	COLMO SAE 0,21 m³ 0,27 yd³

DATI TECNICI

		METRIC		U.S.	Diesel	Benzina
MOTORE						
Benzina	Kohler CH395 9,5 hp					●
Diesel	Yanmar LN 70 6,2 hp				●	
TRASMISSIONE						
Tipo	Idrostatica				●	●
Pompa idraulica	n°3 Pompe ad ingranaggi				●	●
SOTTOCARRO						
Larghezza cingoli	180 mm		(7.1 in)		●	●
Rulli oscillanti	Sì				●	●
IMPIANTO IDRAULICO					●	●
Pompa idraulica	Pompa ad ingranaggi					
Flusso	1x16 l/min		(1x4.2 gpm)		●	●
Pressione max	170 bar		(2466 psi)		●	●
PRESTAZIONI E DIMENSIONI						
Velocità max	approx 0-3.6 Km/h		(0-2.3 mph)		●	●
Capacità operativa	600 kg		(1320 LB)		●	●
Pesi	BE 463 kg /1021 lb	BHE 552 kg /1217 lb	ACBE 506 kg /1116 lb	ACBHE 628 kg /1385 lb		●
	DE 476 kg /1049 lb	DHE 567 kg / 1250 Lb	DEAC 520 kg / 1146 Lb	ACDHE 638 kg / 1407 Lb	●	
Capacità cassone	0,25 m³ - 0,33 yd³				●	●
Freno di stazionamento	Sì				●	●

